

Technical Data VACUDEST XL

10,500 – 22,500 m³ industrial wastewater per year

- VACUDEST Modular-System – Customized systems
- Energy efficient due to 95 % energy recycling
- Cost efficient due highest evaporation rates
- Maintenance friendly design to optimize system availability
- Comfortable Vacutouch control system including internet connection
- State of the art technology stands for highest distillate quality

VACUDEST XL

VACUDEST Modular-System – Features

- Activepowerclean self-cleaning heat exchanger, to reduce operation cost
- Clearcat condensation stage for complete removal of hydrocarbons
- Destcontrol to further improve distillate quality
- e-service, internet connection of Vacutouch control system
- Premium exhaust air cooling, premium noise protection and much more




Technical Data

VACUDEST	annual capacity*	Reference capacity with pure water	Average capacity with wastewater*	Electrical load	Weight (empty)	Energy consumption starting from
XL 10,500	10,500 m ³	1,750 l/h	1.310 l/h	132 kW	8,700 kg	35 kWh/m ³
XL 12,000	12,000 m ³	2,000 l/h	1.500 l/h	160 kW	9,100 kg	40 kWh/m ³
XL 16,000	16,000 m ³	2,660 l/h	2.000 l/h	200 kW	12,000 kg	40 kWh/m ³
XL 22,500	22,500 m ³	3,750 l/h	2,810 l/h	250 kW	15,950 kg	40 kWh/m ³

* 8,000 hours of operation, 5 % average evaporation residue of the wastewater

Dimensions (mm)

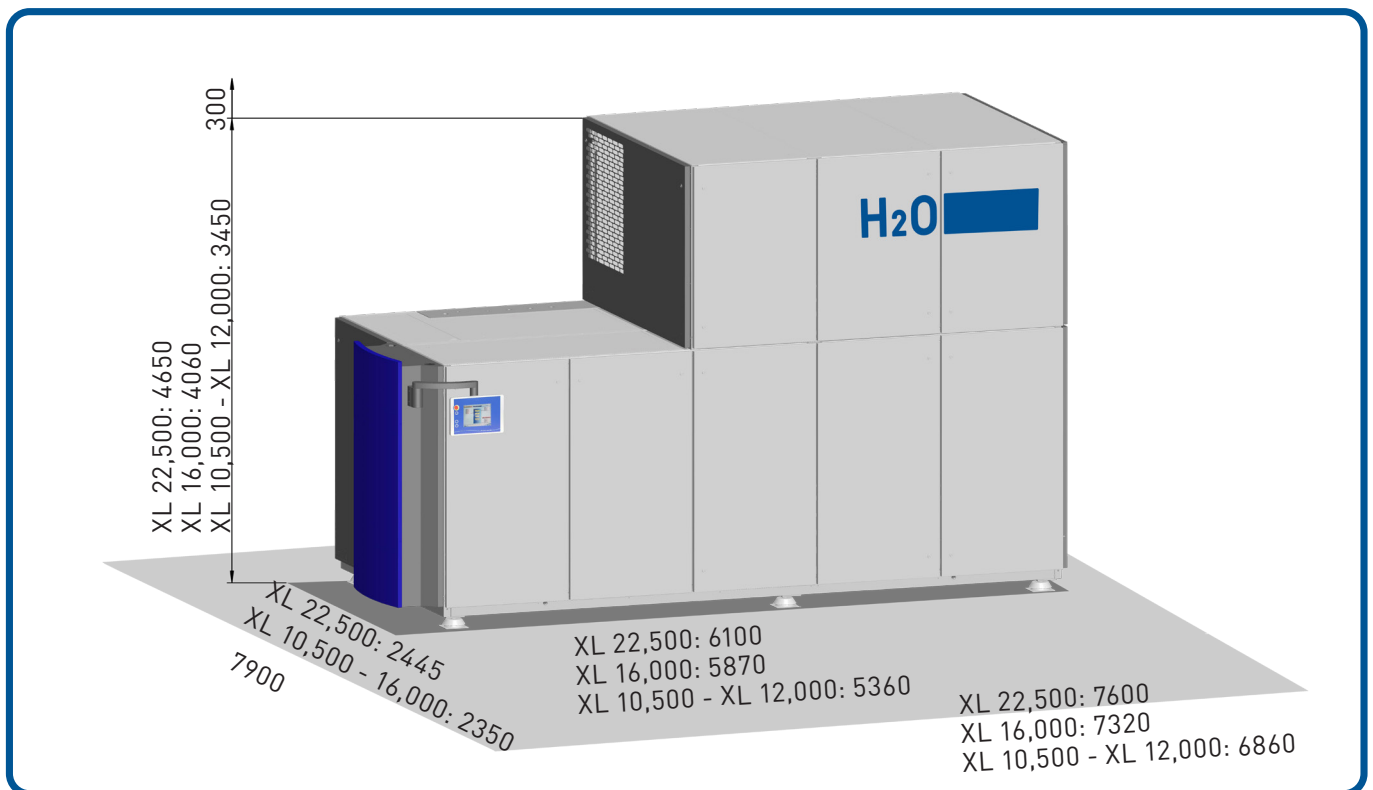

Dimensions of the VACUDEST vacuum distillation systems with optimal maintenance space

Copyright © H2O GmbH 2024 - DE-DB-01/2024